

# Lecture 10

# Prototyping

CE346 – Microprocessor System Design

Branden Ghena – Spring 2021

Some slides borrowed from:

Josiah Hester (Northwestern), Prabal Dutta (UC Berkeley), Project Lead The Way

# Administrivia

- Quiz 2 due tonight
- Reminder on my office hours today:
  - After class 11-12
  - Normal office hours 1-2

# Today's Goals

- Discuss issues to consider when prototyping systems
- Understand how to use breadboards for prototyping
- Explore various components and how you might use them with a breadboard

# Outline

- **Overview of Prototyping**
- Breadboarding Components

# Prototyping goals


- Does this thing work at all?
  - Particular IC
  - Circuit layout
  - Software design
  - etc.
- Sometimes before doing something more serious with it
  - Design a PCB, Make a product, etc.
- Not uncommon that the prototype is as far as you'll get

# Isolating tests

- The goal when prototyping is to isolate the question at hand
- Do consider
  - New sensor/IC/component/whatever
- Do not consider
  - Power
  - Interference
  - Enclosure
  - Stable microcontroller
  - Soldering skills


# Buying Parts

- Prototyping vendors
  - Where you look for cool stuff to buy
  - [Sparkfun](#)
  - [Adafruit](#)
- Electronics vendors
  - Where you buy parts when you know what you need
  - [Digikey](#)
  - [Mouser](#)

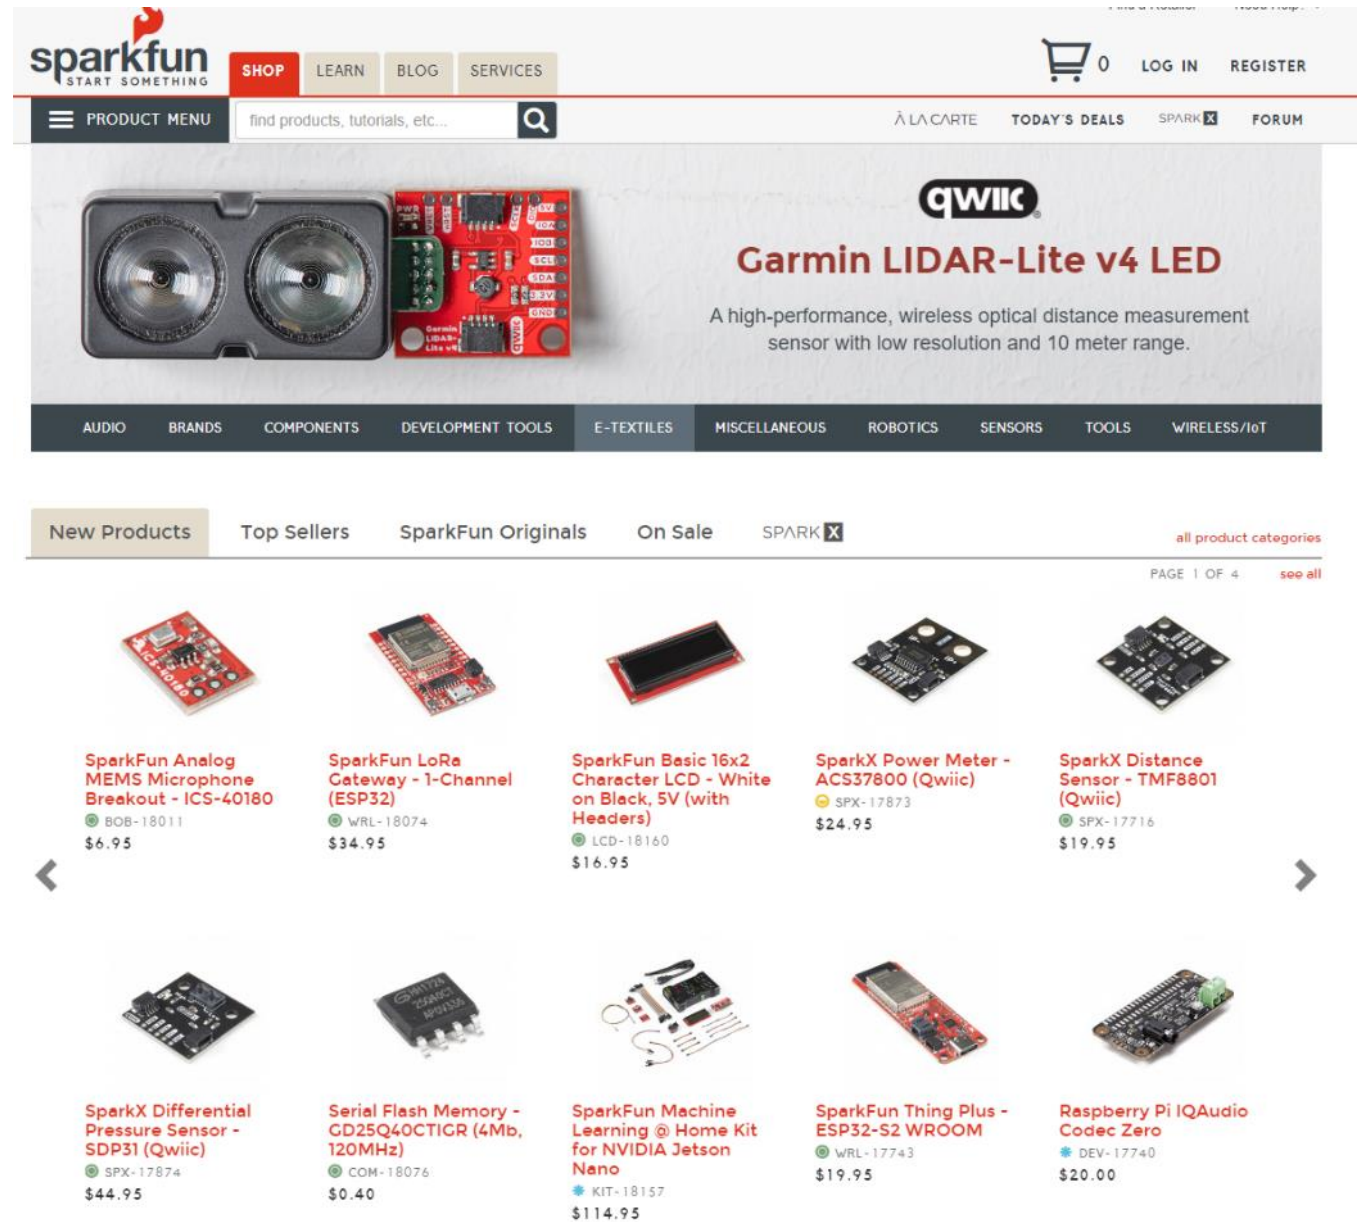

# Prototyping methods


- Breadboarding
  - Plug and connect components as needed
  - Build up arbitrarily complex designs from nothing
- Development kits
  - Pre-fabricated systems design for testing components
- Small-scale test PCBs
  - Design a PCB that demonstrates the thing you're interested in
    - Making a PCB is less hard than some might think (Eagle, [Fritzing](#), etc.)
    - \$20-30 for small, low-speed PCBs from batch services like [OSHPark](#)

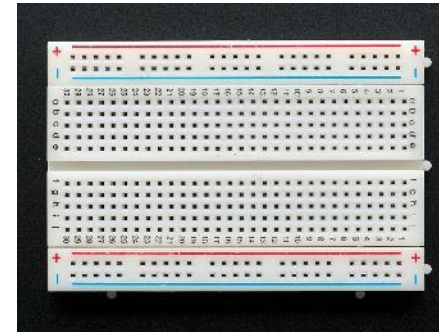





# Breadboards for prototyping

- Reusable platform for temporary circuits
- Plug in jumper wires and through-hole components

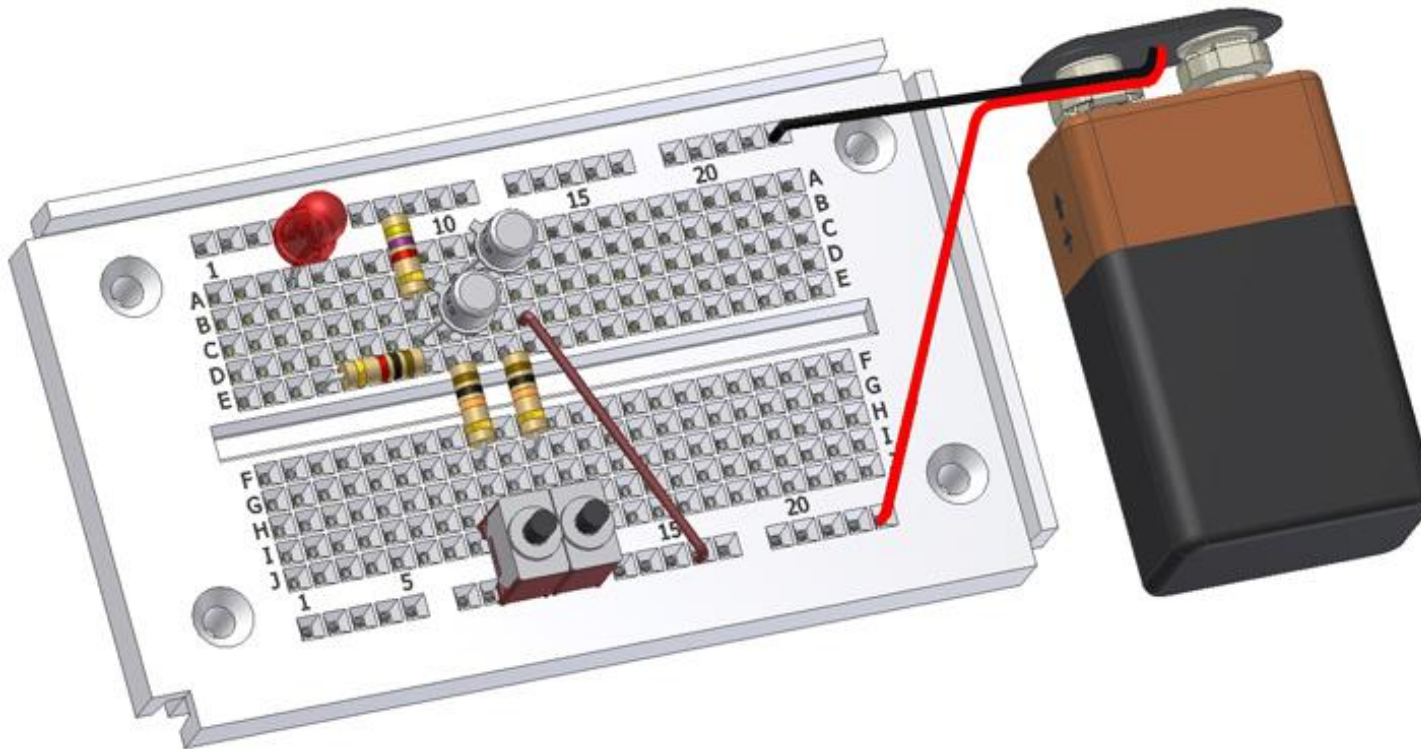


# How a breadboard works

- Component leads and wires are inserted into holes in the breadboard
- Half-rows of five holes are connected
- Vertical columns are connected for power/ground

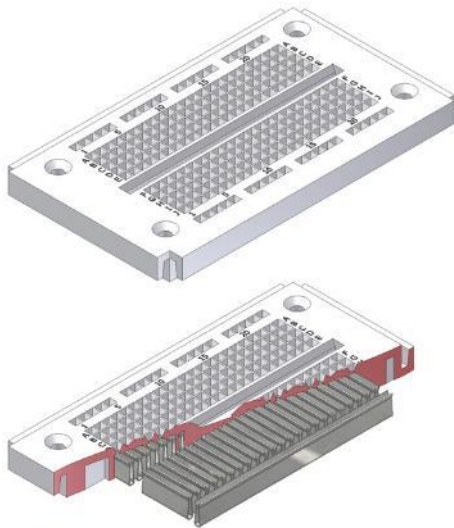


Holes to  
insert wires

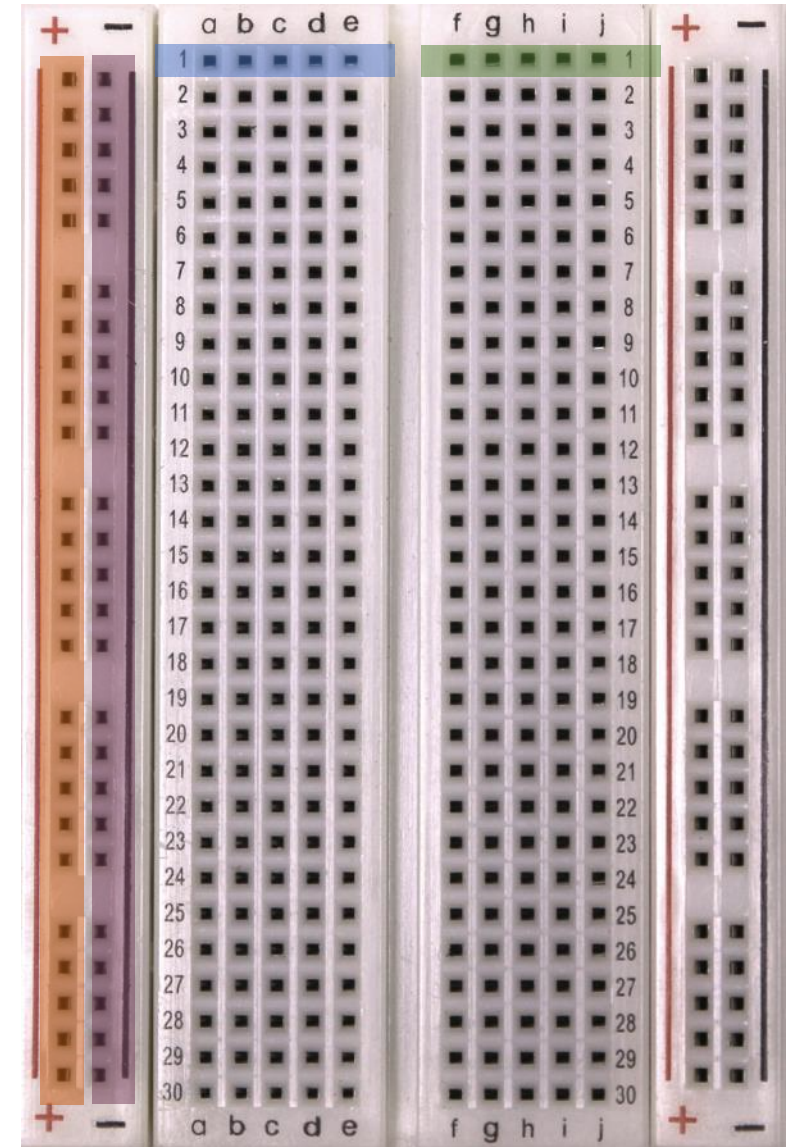


# Breadboard LED example

- Uses button to control LED

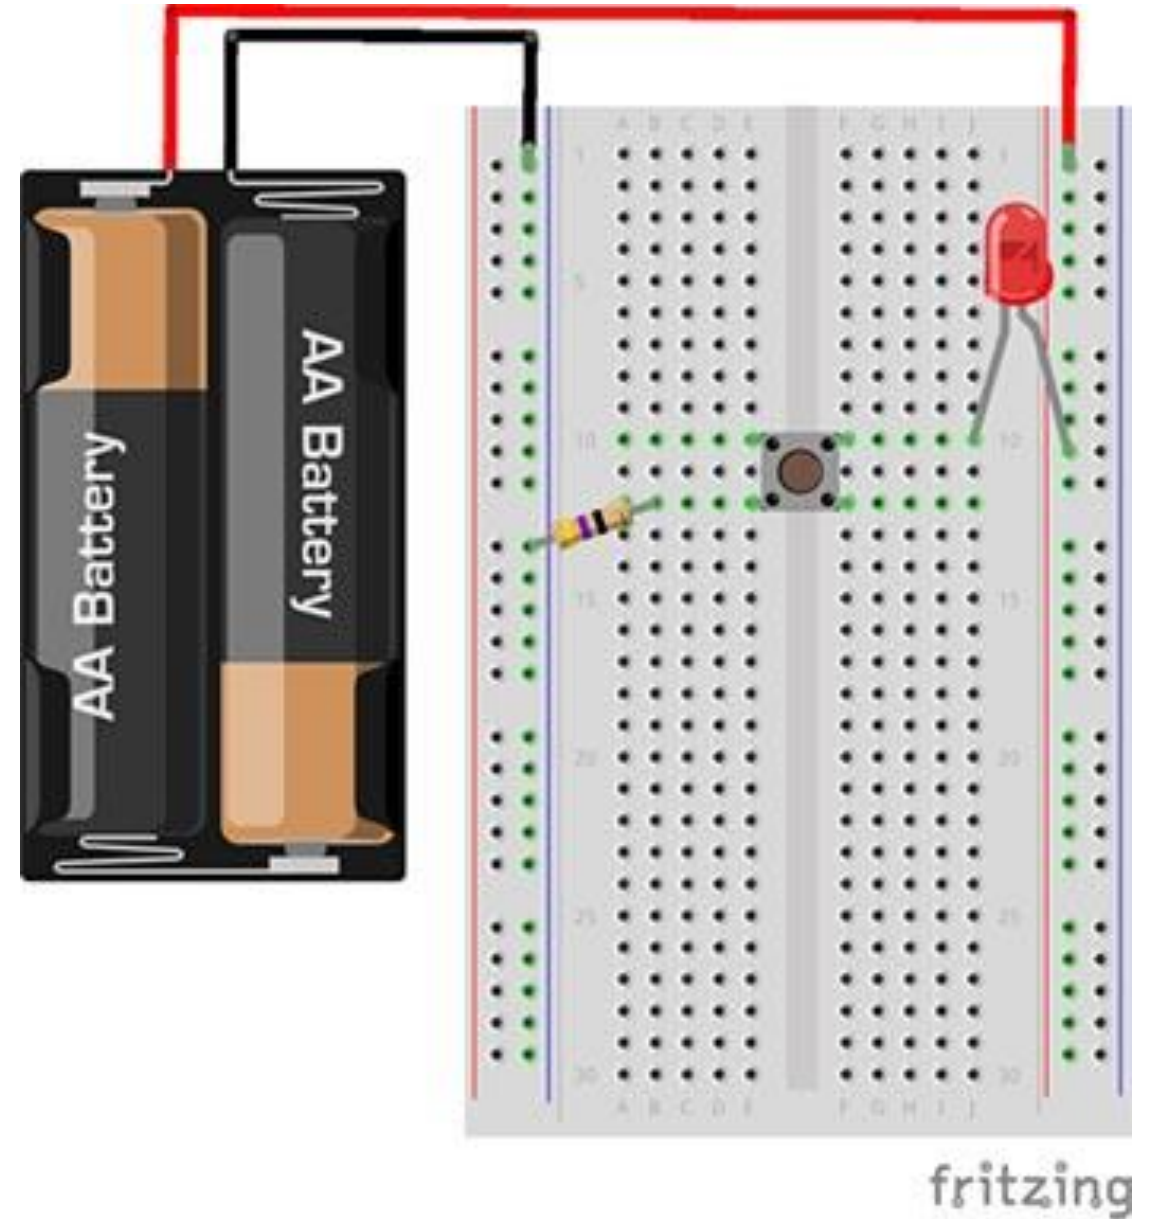


# Breadboard guidelines

- Long wires in large bird nests makes debugging very difficult
  - Shorter, constrained wires are easier to understand
  - In this class, we'll only have large jumper wires though...
- Use the minimum jumpers necessary, mostly use breadboard for connections

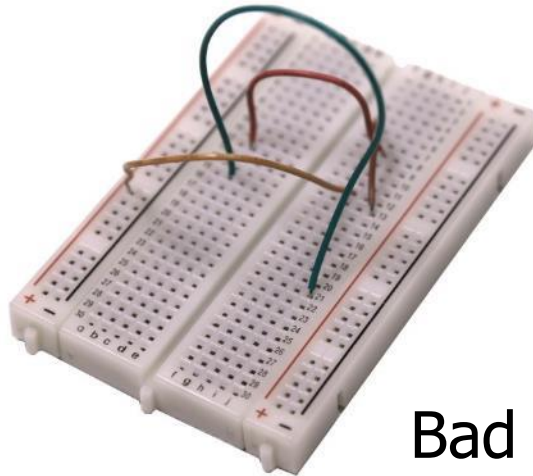

Bad

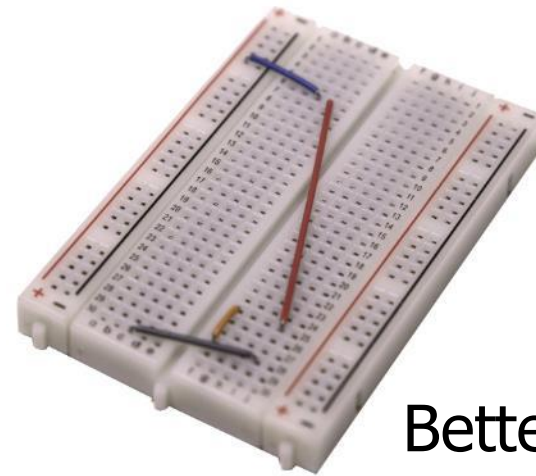


Better



# More permanent breadboards

- Breadboards are also known as “Solderless Breadboards”
- Protoboard allows configurable circuits
  - Solder jumper wires between locations
  - Solder adjacent pads to form connection
- Usually not worth it (just make a PCB)
  - Does solve core problem of breadboards: things getting unintentionally unplugged

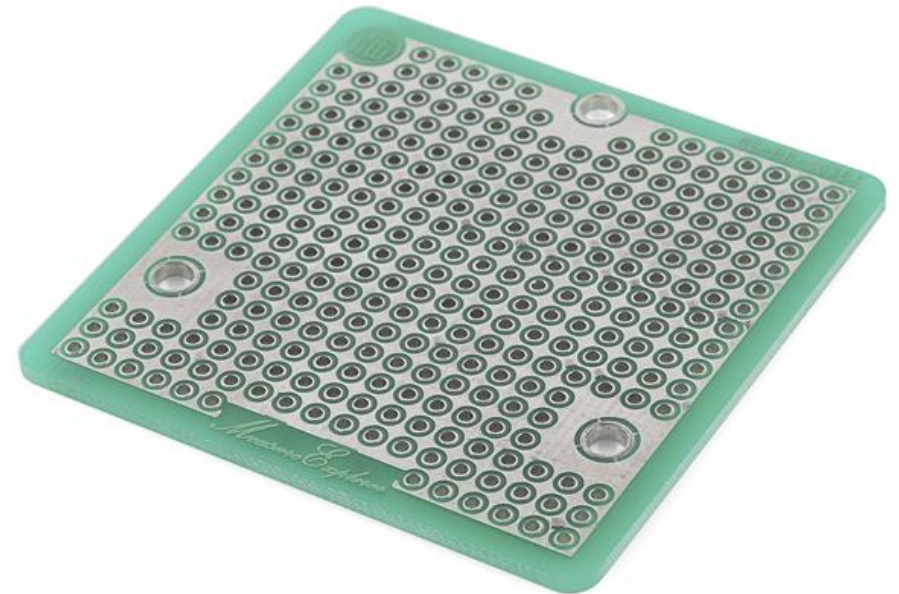

# When to not use breadboards

- Breadboards work great for digital circuits and simple analog!
- High voltage/current are bad for breadboards
  - Honestly, anything above 12 volts DC shouldn't be in a breadboard
  - Also avoid high-power applications above a few Watts
  - Never put AC in a breadboard
- Sensitive analog circuits
  - Particularly anything sensitive to capacitance may not work right
  - Sets of metal holes with strips connecting them function as capacitors
- Anything in long term use

# Outline

- Overview of Prototyping
- **Breadboarding Components**

# Prototyping with a breadboard

- What kinds of things might you use with a breadboard?
- Jumper wire
- Microbit!
- Resistors/Capacitors
- LEDs
- Buttons/Switches
- Analog Sensors
- Various other through-hole components
  - Transistors, Op-Amps, other ICs




<https://www.adafruit.com/product/2975>



# Jumper wires

- Connect two rows in the breadboard together
- Recommendation:
  - Peel off sets of 2-4 wires and keep them stuck together
  - Often want to run multiple at once


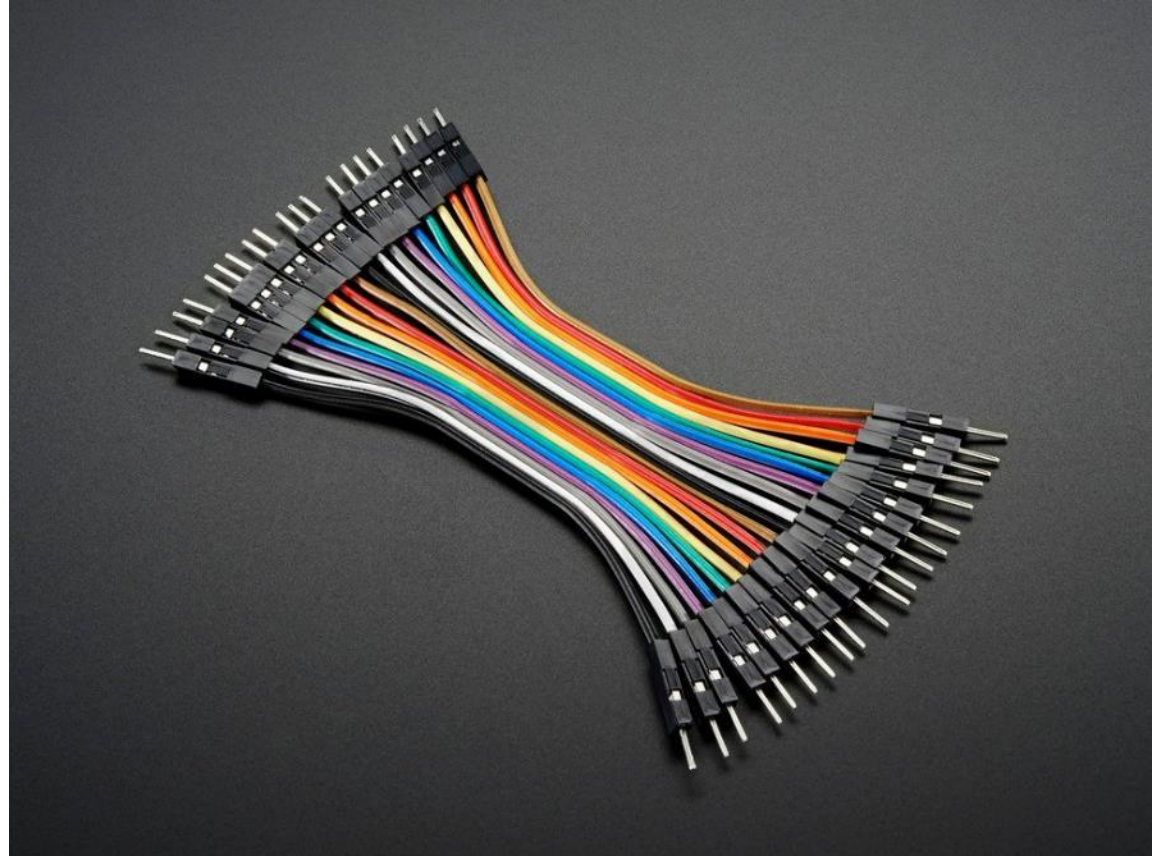


# Microbit

- Always connect LED matrix side up
- Breaks out various pins from board
  - Need to consult table to know which pins
  - <https://tech.microbit.org/hardware/schematic/>


<https://www.sparkfun.com/products/13989>

<https://learn.sparkfun.com/tutorials/microbit-breakout-board-hookup-guide>

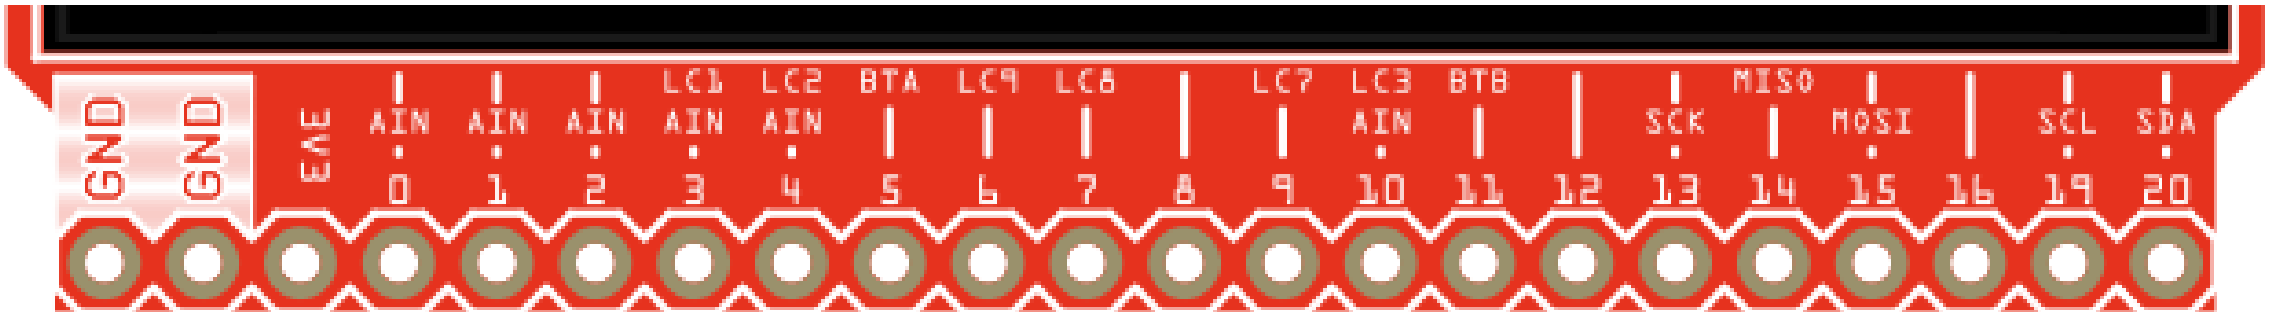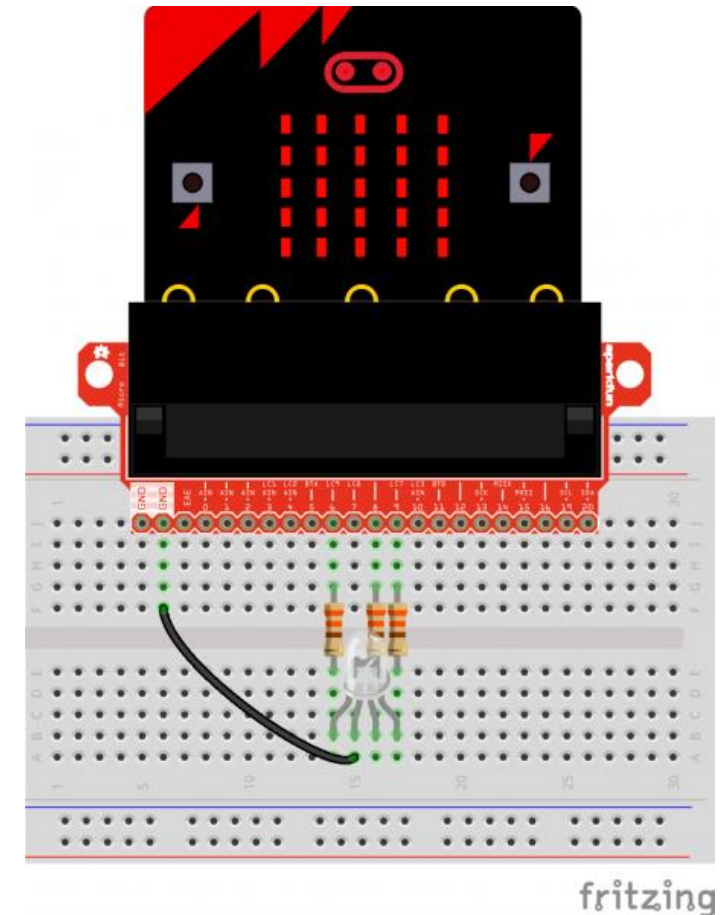


# Resistors


Carbon Film Resistors

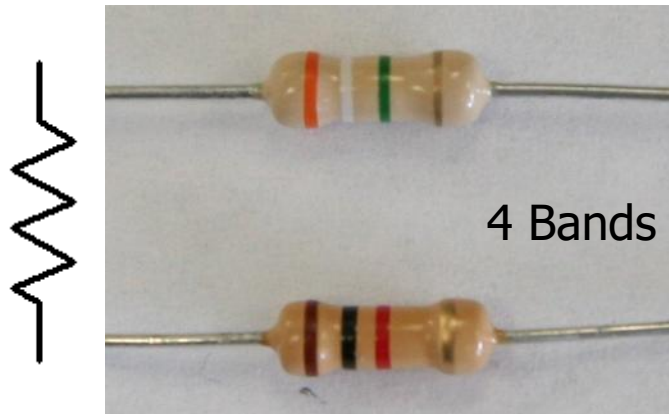

Surface Mount Resistors

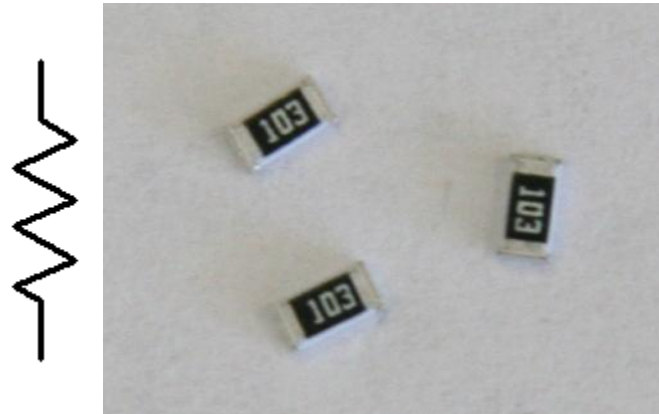


Variable Resistors

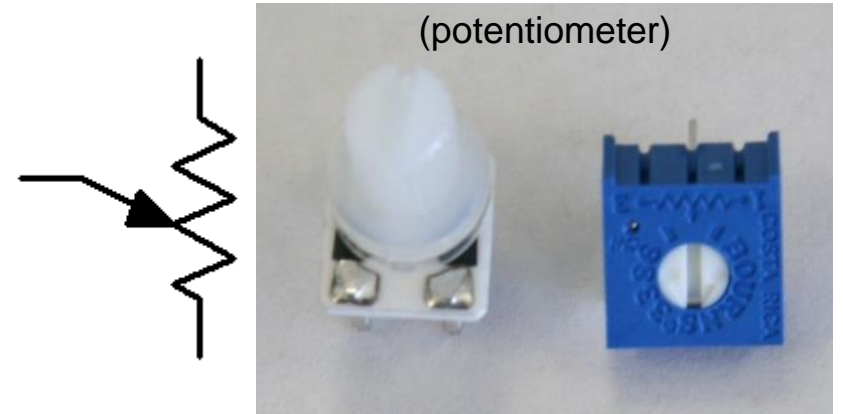


# Resistor color codes

- Colored bands on resistors label the resistance value of the part
- First and second bands are the digits
- Third band is multiplier
- Fourth band is tolerance
  - Usually gold: +/- 5%

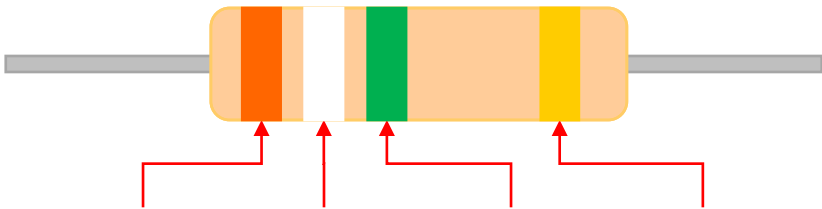

	1 <sup>st</sup> Band	2 <sup>nd</sup> Band	Multiplier	Tolerance
NONE				20%
Silver			0.01	10%
Gold			0.1	5%
Black	0	0	1	
Brown	1	1	10	
Red	2	2	100	
Orange	3	3	1K	
Yellow	4	4	10K	
Green	5	5	100K	
Blue	6	6	1M	
Violet	7	7	10M	
Gray	8	8	100M	
White	9	9	1000M	


# Example: determine the resistor

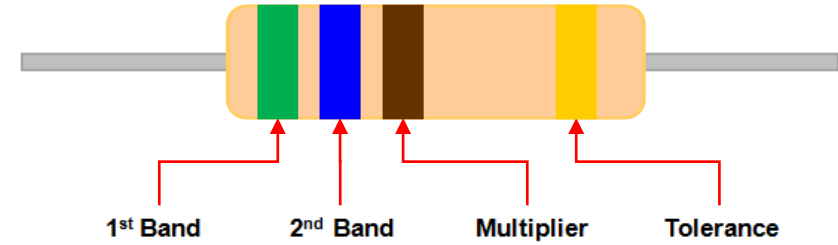

NONE			20%
Silver		0.01	10%
Gold		0.1	5%
Black	0	0	1
Brown	1	1	10
Red	2	2	100
Orange	3	3	1K
Yellow	4	4	10K
Green	5	5	100K
Blue	6	6	1M
Violet	7	7	10M
Gray	8	8	100M
White	9	9	1000M

# Example: determine the resistor



- $56 \times 10 \Omega = 560 \Omega (\pm 5\%)$

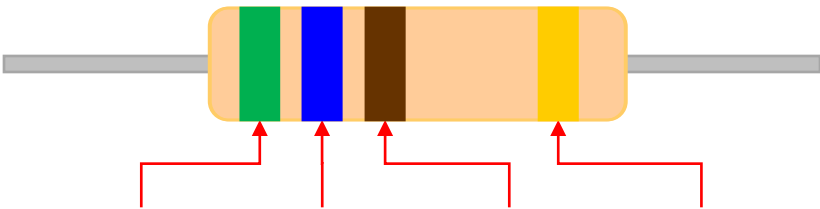

	1 <sup>st</sup> Band	2 <sup>nd</sup> Band	Multiplier	Tolerance
NONE				20%
Silver			0.01	10%
Gold			0.1	5%
Black	0	0	1	
Brown	1	1	10	
Red	2	2	100	
Orange	3	3	1K	
Yellow	4	4	10K	
Green	5	5	100K	
Blue	6	6	1M	
Violet	7	7	10M	
Gray	8	8	100M	
White	9	9	1000M	


# Potentiometers

- Vary resistance between zero and some maximum
  - 1 k $\Omega$ , 10 k $\Omega$ , 100 k $\Omega$  common
- Connect middle and an edge for just a changeable resistor
- Middle terminal is a movable resistor divider
  - Knob changes middle output if outer pins are VCC and Ground

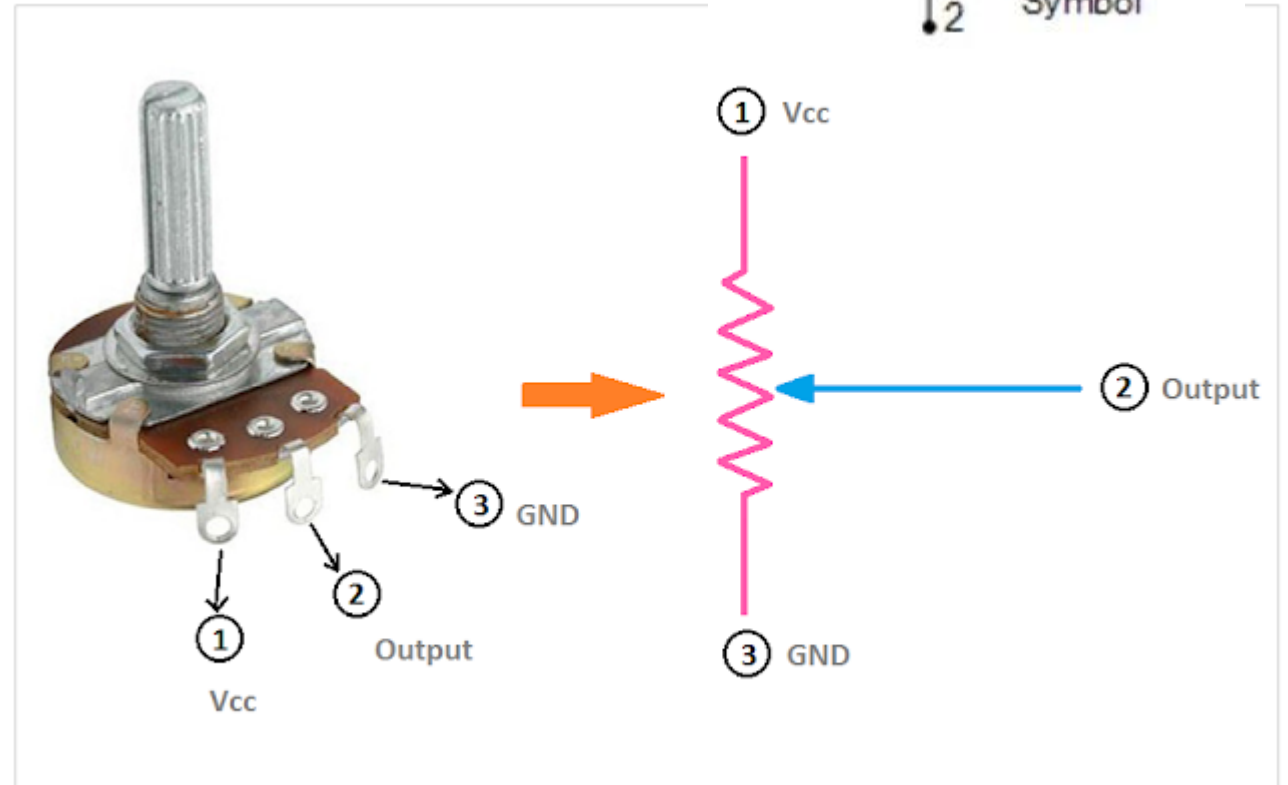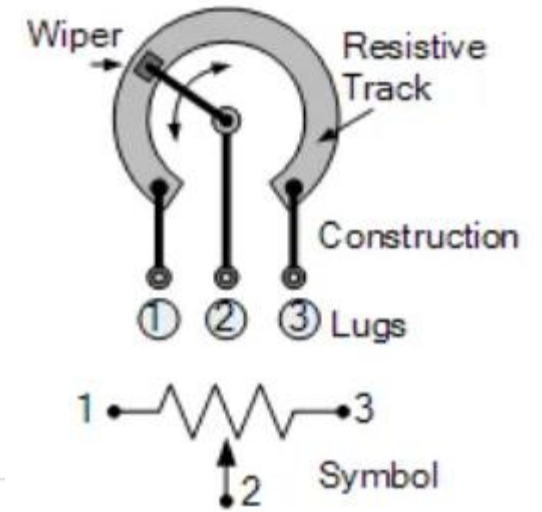

# LEDs

- Directional component: only allows current to flow one way
- Shorter side is the negative one
  - i.e. where current flows to

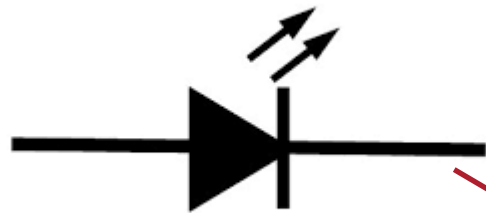

Schematic Symbol

Negative ( - ) lead

Larger metal component inside of case or case flat spot is cathode or negative (-) lead



Shorter wire is cathode or negative (-) lead





# RGB LED

- Three different colors of LED in a single large diffuser
- Short leads are negative ends
  - One for each color
- Long lead is common power
  - Common anode
- Combinations of LEDs give other colors
  - Cyan, Yellow, Violet, White

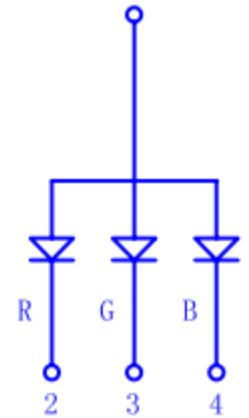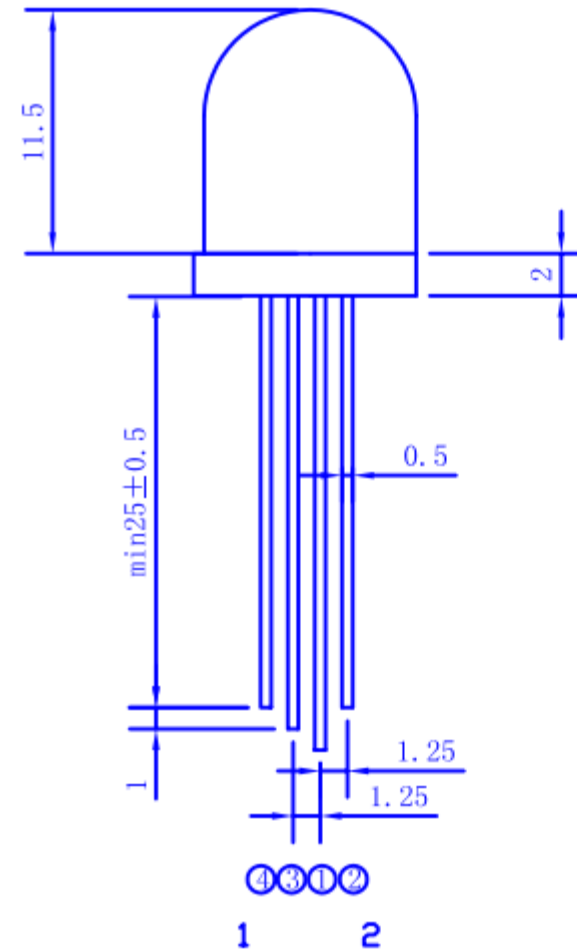

PIN2 RED COLOR DICE  
PIN3 GREEN COLOR DICE  
PIN4 BLUE COLOR DICE

<https://cdn-shop.adafruit.com/datasheets/FLR-100WAS-RGB.pdf>

# Sensors

- Thermistor



- Photoresistor



Breadboard demo!

# Breadboard demo!

- RGB LED
  - Plus resistors
- Control LED with
  - Switch
  - Potentiometer
  - Photoresistor

# Outline

- Overview of Prototyping
- Breadboarding Components