Lecture 17 Embedded Systems Research

CE346 – Microprocessor System Design Branden Ghena – Fall 2022

Some slides borrowed from: Josiah Hester (Northwestern), Prabal Dutta (UC Berkeley)

Administrivia

- This is the last lecture!!
 - No class after Thanksgiving
 - I'll hold office hours, but in my office
 - WARNING: CG50 is busy 3:30-5:00 pm Tuesday/Thursday (CE355)

- Project Demos Tuesday of Exam Week
 - Tuesday 12/6, Mudd 3514, 1:00-7:00 pm
 - I'll release a schedule next week (everyone can be accommodated)

Today's Goals

- Explore sensing systems research
 - What does it mean to do "research"
 - Explore a research project in that context (Powerblade)
 - Discuss some example Sensing Research projects
 - Most shallowly
 - Signpost project deeply

Outline

- What does research look like:
 - Research Overview
 - Example: Powerblade

- Sensing Systems Research
 - Various Projects
 - Signpost

What is research anyways?

I think of research as just "figuring stuff out"

- This is part of why research feels so vague: there are many ways to figure things out, depending on the question
 - Read papers
 - Run experiments
 - Send out surveys
 - Build something

Academic research

We all do research all the time in our daily lives

- Academic research is mostly about the question you're figuring out
 - Is the question important in some way?
 - Is the question something that's not trivial to answer?
 - Does the answer provide value?

Finding the "right" questions is hard

Academic research in engineering

- Often intertwines the act of "figuring out" with engineering
 - Need to build something to try out and that can answer the question
- Hard part is remembering that the question is more important than the engineering
 - Building something that only partially works is fine if it answers the question
 - We call this a research prototype
- Unfortunately, something working in a research paper is definitely not the same as a working product

Getting a PhD

- PhD students "do research"
- Getting a PhD requires a thesis (a good question) and a dissertation (describing and proving the answer)
- PhDs in engineering in US
 - 5-6 years average
 - Are paid for! (tuition plus \$30k-40k)
 - Are not a good monetary decision in CS
 - There are other reasons for them, just not for money

Getting involved in research

- Research with faculty
 - Often take a 300-level course with a faculty and do well
 - Then talk to them about joining their lab
- NSF Research Experience for Undergrads
 - Summer programs held at universities throughout the US
 - You apply for these, like internships

- Any research counts! Even if it's not in exactly your field
 - You'll find more similarities than differences
 - It all looks similarly good on applications

Research outputs

- Papers (Journal, Conference, Workshops, etc.)
 - Provide a mechanism for others to find your work
 - Peer-reviewed papers are reviewed by other professors in the field to ensure that the seem valid

- Good papers do the following
 - Explain what the problem is
 - Explain why the problem is important
 - Explain how other research relates to this
 - Explain an answer to the problem
 - Prove that the answer to the problem is real
 - Explain the limitations of the answer

Outline

- What does research look like:
 - Research Overview
 - Example: Powerblade

- Sensing Systems Research
 - Various Projects
 - Signpost

Powerblade (DeBruin, Ghena, Kuo, Dutta)

• 1" x 1" x 1/16" plug load power meter

 Measures AC voltage and current and reports real-time power draw over Bluetooth Low Energy






 Question: can a plug-load power meter be created in a 2D form factor to enable easy deployability while still being accurate?

What is the problem and why is it important?

 Miscellaneous electrical loads (MELs) occupy an increasingly large percentage of overall energy use

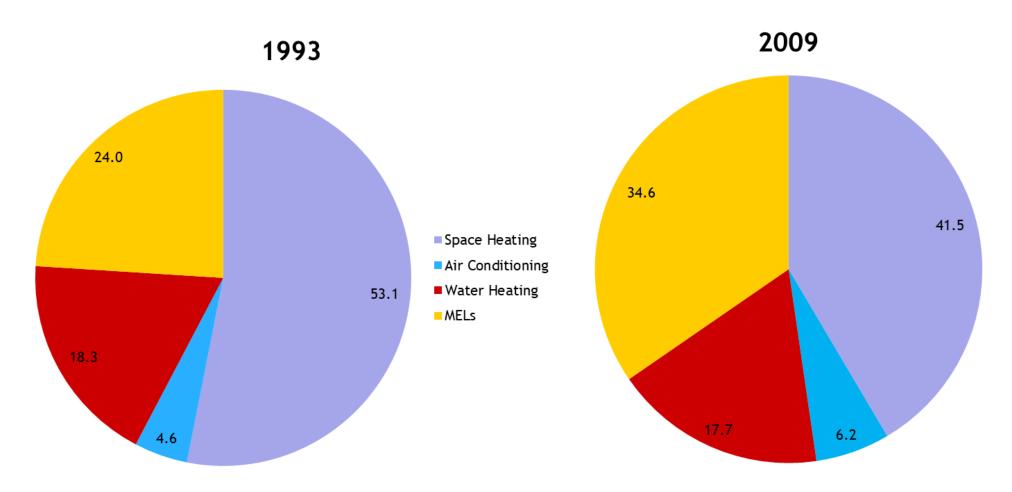

What is the problem and why is it important?

 Existing power meters are too cumbersome for ubiquitous deployment

- Goal: unobtrusively measure all plug-loads in a home over a long period of time with high fidelity and low cost
 - Needs to be real-world sustainable
 - Needs to not impede daily life



How does other work relate to this?

- No other devices are as small as Powerblade
- Many use more power themselves
- Some do not have wireless communication or measure real power

| Metering Device | Power Supply | Voltage | Current | Real Power? | Data Output | Static Power | Volume |
|-----------------------------|----------------|---------|---------------------|-------------|-------------|------------------------|----------------------|
| Kill-A-Watt [6] | Capacitor fed | Divider | Resistor | Yes | LCD | 450 mW | 14.0 in ³ |
| Watts Up [17] | Capacitor fed | Divider | Resistor | Yes | LCD or USB | 590 mW | 31.9 in ³ |
| Belkin Conserve Insight [3] | Capacitor fed | Divider | Resistor | Yes | LCD | 440 mW | 21.8 in ³ |
| ACme-A [26] | Capacitor fed | Divider | Resistor | Yes | 802.15.4 | 1000 mW | 13.7 in ³ |
| ACme-B [26] | Transformer | Divider | Hall effect | Yes | 802.15.4 | 100 mW | 13.7 in ³ |
| Monjolo [23] | Energy harvest | None | Current Transformer | No | 802.15.4 | 4 mW | 7.8 in ³ |
| Gemini [20] | Energy harvest | Virtual | Current Transformer | Yes | 802.15.4 | Not Publi | shed |
| PowerBlade (this work) | Resistor fed | Divider | Magnetometer | Yes | BLE | 80-176 mW [†] | 0.07 in ³ |

Table 1: Comparison of various power meters. PowerBlade is the smallest, lowest power, wireless true power meter. †Depends on data rate.

What is an answer to the problem?


Must re-think design of power meters from basics

- Five core steps that a power meter must handle
 - 1. Convert AC mains voltage to usable DC voltage
 - 2. Measure voltage
 - 3. Measure current
 - 4. Calculate power and energy
 - 5. Communicate measurements

Revisit each and show that it can be changed

Answer - creating a usable DC voltage

- Basic circuit below applies
 - But usually Z_{in} is a large capacitor to provide enough power for the device to run
 - We can instead use a small resistor if our average current is very low (< 800 μA)

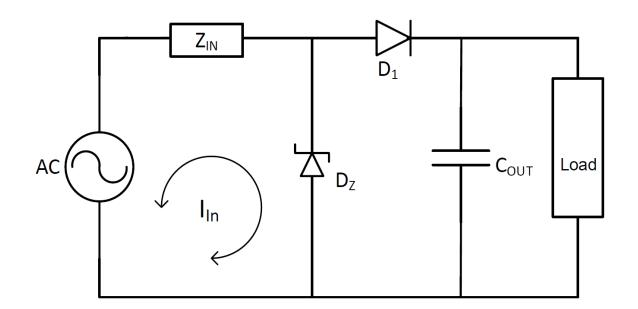



Kill-A-Watt





Belkin Insight

Answer - measuring voltage

Sockets take up a lot of physical room




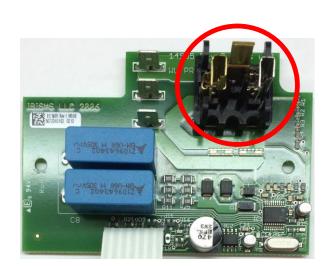

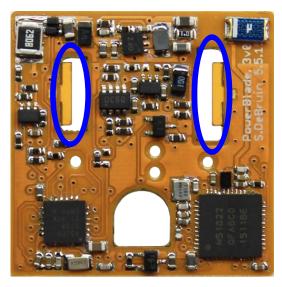

Flexible tabs


- Instead use flexible PCB tabs
- (This was finicky and non-reusable in practice)

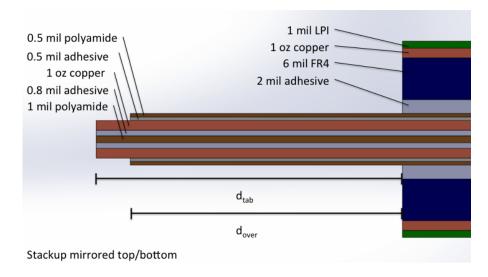


Answer - measure current

 Horizontally wound coil translates magnetic field into a voltage

 Creates a signal that is the derivative of current

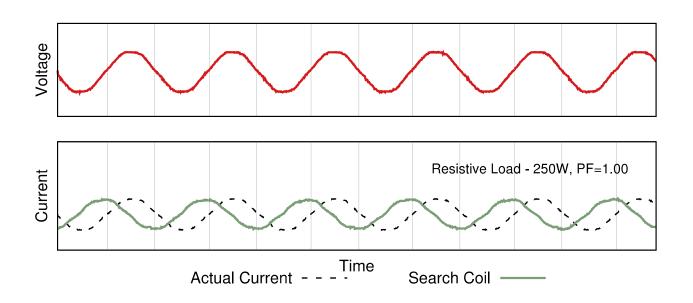

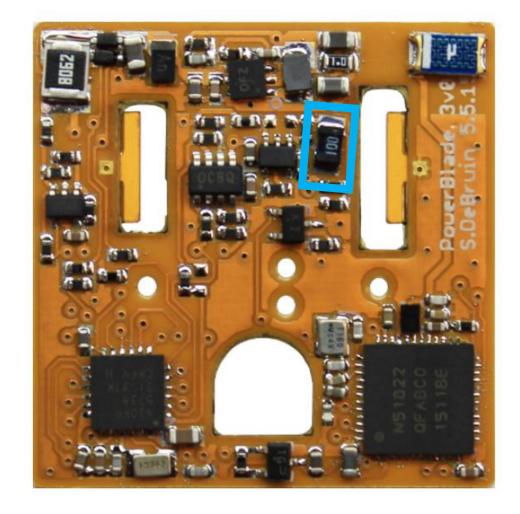


Answer - calculate power and energy

- Perform computation in a modern microcontroller
 - Keeps up with calculations that an IC usually does
 - MSP430FRxx MSP430 with FRAM

- Can perform work at a very low average power
 - Sampling, integration, computation, and output


Answer - communicate measurements

- Transmitting average power over BLE presents results while keeping within energy budget
 - Update average measurements once per second
 - Send 5 packets per second for reliability

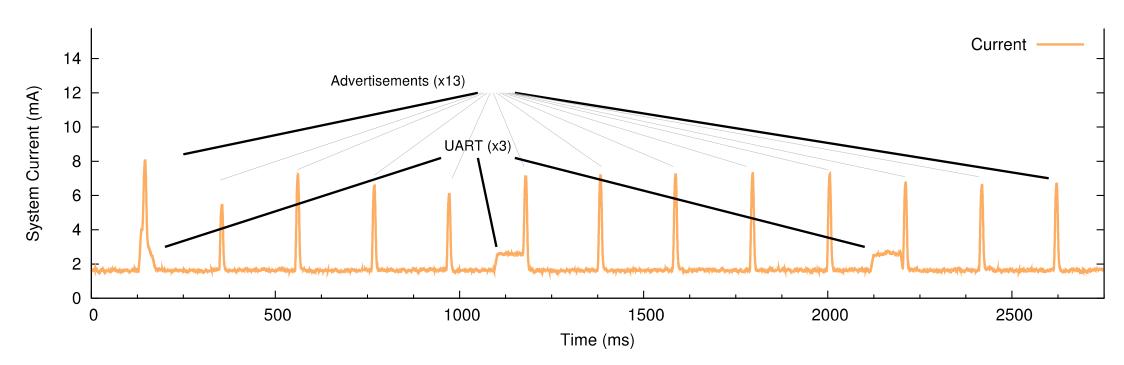

Prove that the answer to the problem is real


• From 2 W to 1200 W, average error is 1.13%

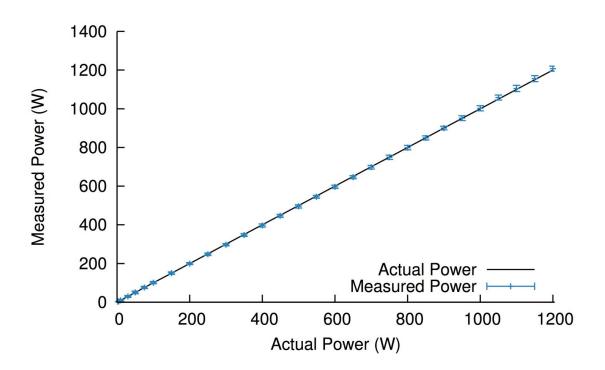


| Device | Power Factor | Power | PowerBlade Error | |
|----------------------|-----------------|-----------|------------------|--------|
| 150 W Bulb | 1.00 | 162.17 W | -0.99 W | 0.61% |
| Fridge | 1.00 | 108.22 W | -5.30 W | 4.90% |
| Drill (Max) | 0.99 | 253.21 W | 2.96 W | 1.26% |
| Toaster | 0.99 | 827.87 W | -22.11 W | 2.67% |
| Vacuum | 0.98 | 1246.96 W | 15.24 W | 1.22% |
| Microwave | 0.92 | 1729.73 W | 16.01 W | 0.93% |
| Hot Air Gun | 0.83 | 305.54 W | -1.93 W | 0.63% |
| TV (Normal) | 0.62 | 196.23 W | -9.03 W | 4.60% |
| TV (Static Image) | 0.61 | 129.51 W | -4.00 W | 3.09% |
| 50 W CFL | 0.61 | 48.57 W | -9.51 W | 19.58% |
| Xbox One | 0.57 | 50.44 W | -0.83 W | 1.65% |
| MacBook | 0.51 | 52.68 W | -4.49 W | 8.52% |
| Blender | 0.49 | 106.63 W | 36.97 W | 34.67% |
| Router | 0.46 | 9.11 W | -0.62 W | 6.81% |
| Drill (Low) | 0.30 | 51.10 W | 20.40 W | 39.92% |

Explain the limitations


- Power factor measurements are very power at low wattages
 - Although the wattage itself remains accurate

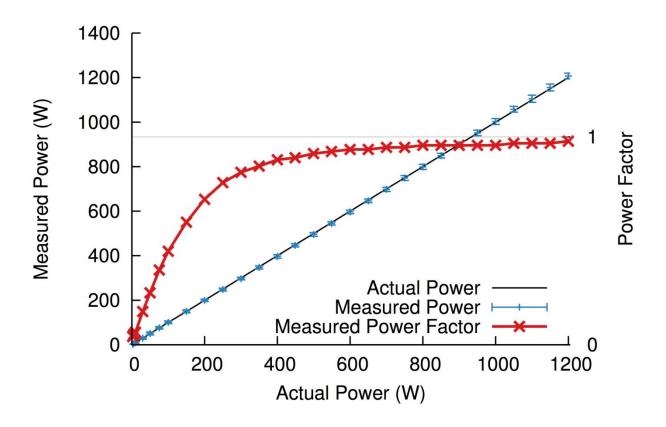

 Also change to pogo pins for better, repeatable contact

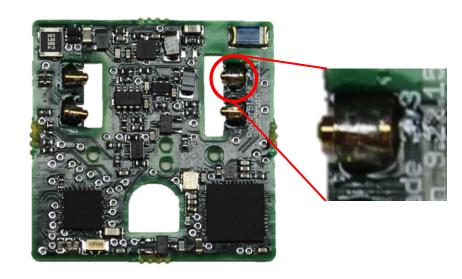

Break + xkcd

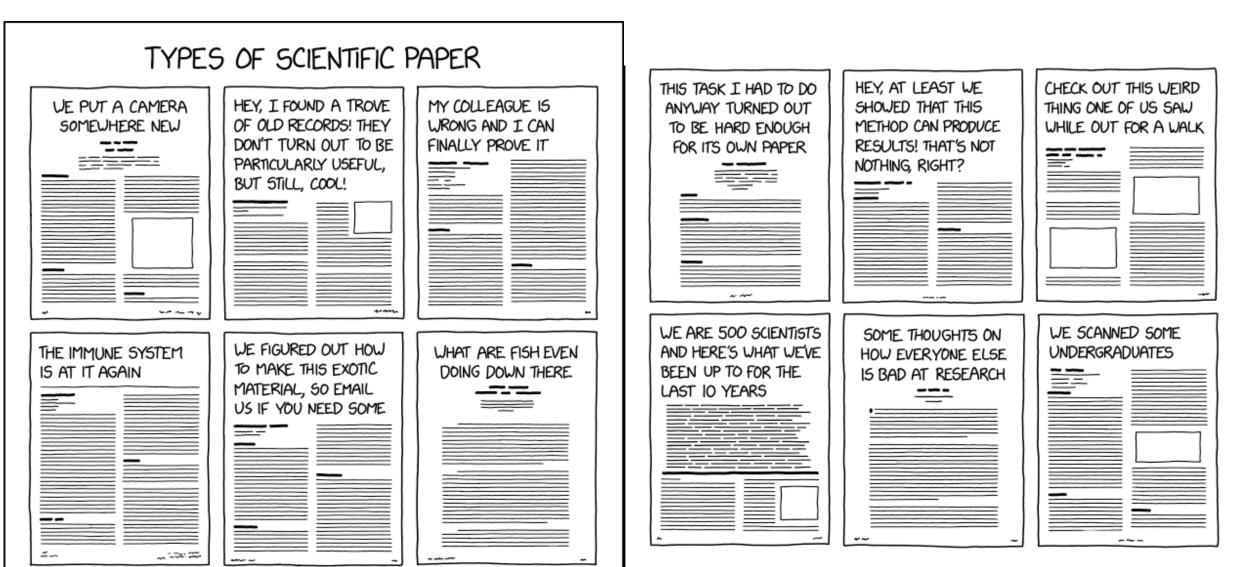

https://xkcd.com/2456/

Outline

- What does research look like:
 - Research Overview
 - Example: Powerblade

- Sensing Systems Research
 - Various Projects
 - Signpost

Conferences for sensing systems research

- SenSys
 - Conference on Embedded Networked Sensor Systems
- IPSN
 - Conference on Information Processing in Sensor Networks
- MobiCom
 - Conference on Mobile Computing and Networking
- <u>UbiComp</u>
 - Conference on Pervasive and Ubiquitous Computing
- Various other systems or HCI venues
 - Occasionally Electrical or Civil Engineering venues too

Sensing systems research

- Combination of engineering and exploration
- Generally divides into two different focuses
 - Often projects will mix some of each domain

Platforms

- How to improve the capabilities of sensing systems
- Examples: lower power, better wireless, new sensors

Applications

- How to use sensing systems to meet some desired goal
- Examples: track human interactions, measure household energy use

Sensing systems research

Platforms


- How to improve the capabilities of sensing systems
- Examples: lower power, better wireless, new sensors


Applications

- How to use sensing systems to meet some desired goal
- Examples: track human interactions, measure household energy use

Permamote (Jackson, Adkins, Dutta)

- Goal: create a 10-year wireless sensor
- Solutions
 - Modern sensors and microcontroller
 - Energy harvesting combined with rechargeable battery
 - Non-rechargeable battery as backup power

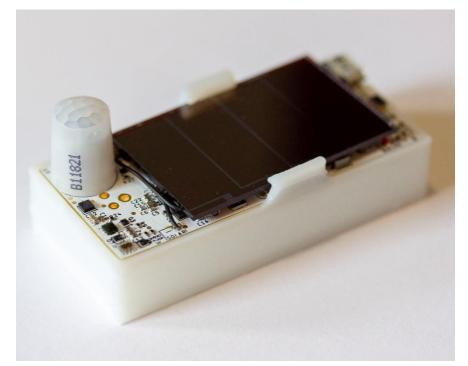

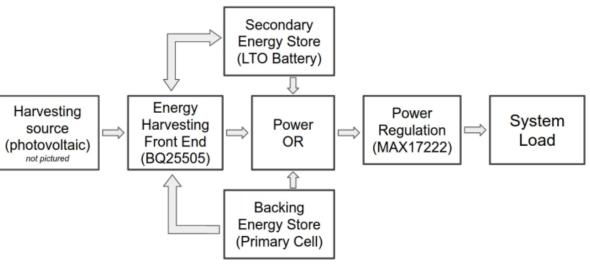


Permamote low energy design

 Uses components with extremely low idle power to limit energy needs

 Combination of harvesting plus battery enables continuous operation

| Component | Function | Active Power | Idle Power | |
|------------------------|-----------------|-------------------|---------------------|--|
| Nordic NRF52840 | Processor | 56 μA/MHz | 940 nA ^a | |
| Nordic INC 32840 | Radio | 5.2 mA @ 0 dbm | _ a | |
| Ambiq AB1815-T3 | Real time clock | 55 nA | N/A b | |
| ST Micro LIS2DW12 | Accelerometer | 1 uA @ 12.5 Hz | 50 nA | |
| Maxim MAX44009 | Light sensor | 650 nA | N/A ^b | |
| Intersil ISL29125 | Color sensor | 56 μA | 500 nA | |
| Silicon Labs SI7021 | Humidty sensor | 1.5 μA @ 1 Hz | 60 nA | |
| TE Connectivity MS5637 | Pressure sensor | 0.6 - 5 μA @ 1 Hz | 10 nA | |
| Panasonic EKMB11011 | PIR Occupancy | 100 μΑ | 1 uA | |


^a Sleep current for both processor and radio. ^b No shutdown or idle mode.

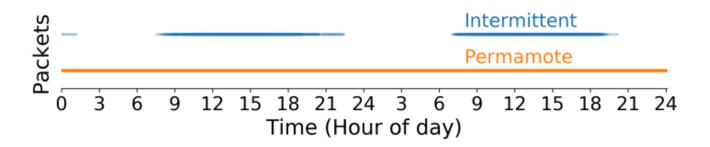

Tock (Levy, Campbell, Ghena, Giffin, Pannuto, Dutta, Levis)

- Goal: safe and reliable embedded OS
 - Demonstrate this is possible on small embedded platforms
- Solutions
 - Dedicated OS kernel with separate applications
 - Protect applications with hardware features
 - Memory Protection Unit
 - Protect kernel with language features
 - Rust programming language

Tock software organization

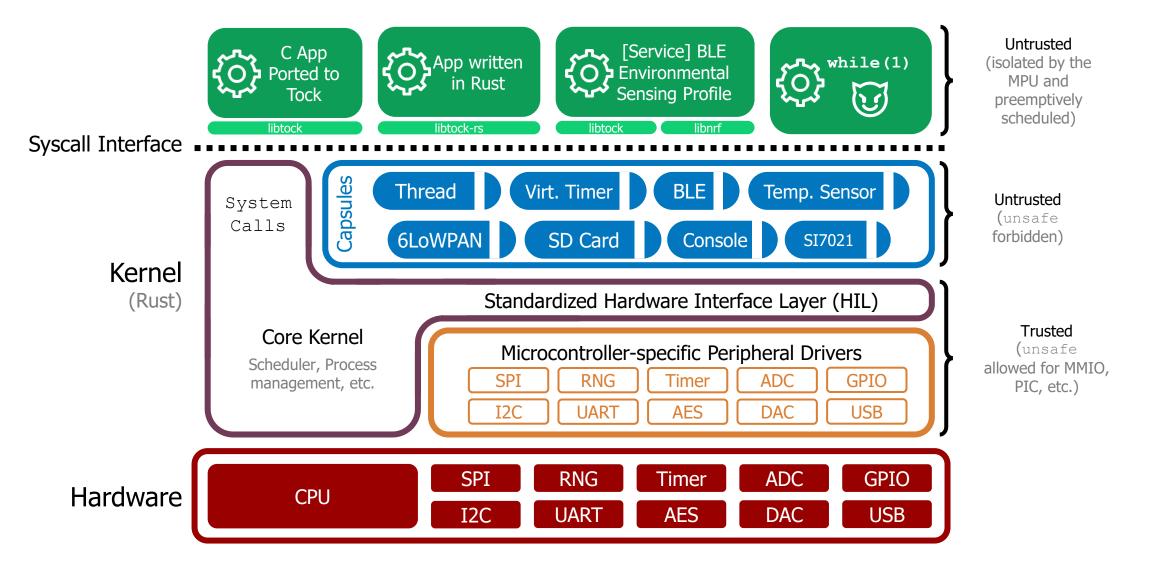

Sensing systems research

Platforms

- How to improve the capabilities of sensing systems
- Examples: lower power, better wireless, new sensors

Applications

- How to use sensing systems to meet some desired goal
- Examples: track human interactions, measure household energy use


Opo (Huang, Kuo, Pannuto, Dutta)

- Goal: sense distance of human interactions
 - Real-time, high accuracy, deployable




- Ultrasonic allows for low-power detection of nearby devices
- Also provides directionality
- Measure difference in arrival time of RF and Ultrasonic to determine distance



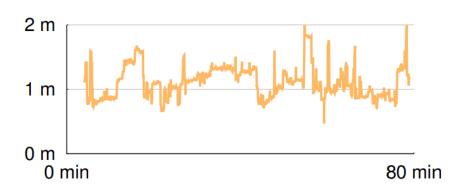

Opo low-energy ranging

- RX of ultrasonic pulse wakes the device
- Listens for RF and ultrasonic to measure time difference

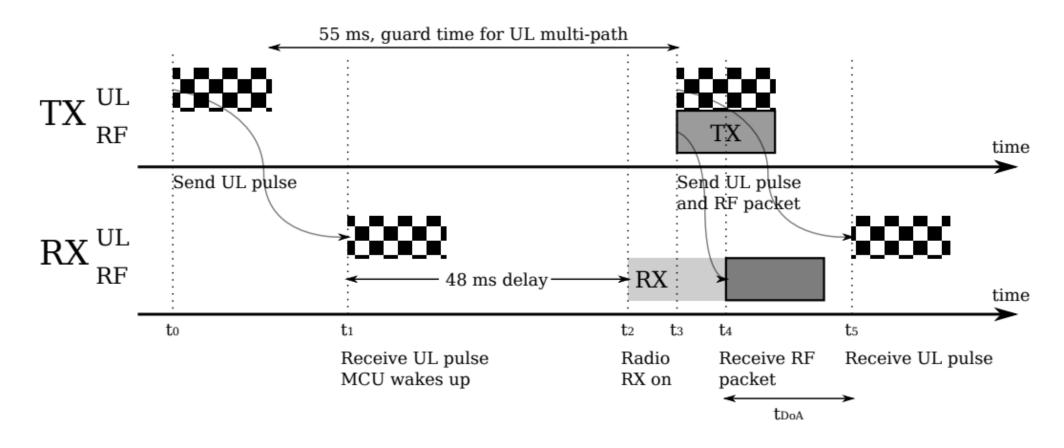


Powerwatch (Klugman, Adkins, et al.)

- Goal: measure electric grid reliability in developing regions
- "Access alone is insufficient. Reliability matters too."

Solutions:


- Wall-powered sensor with battery-backup to detect outages and report over cellular
- Infrastructure to collect measurements and cross-correlate
- Create a team to manage the deployment

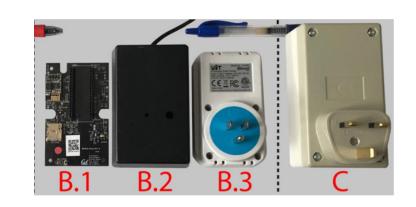

Powerwatch deployments require continuous upkeep

Handing someone a sensor does not guarantee long deployment

• Initially 1000 devices fell to 600, then 300 over three months

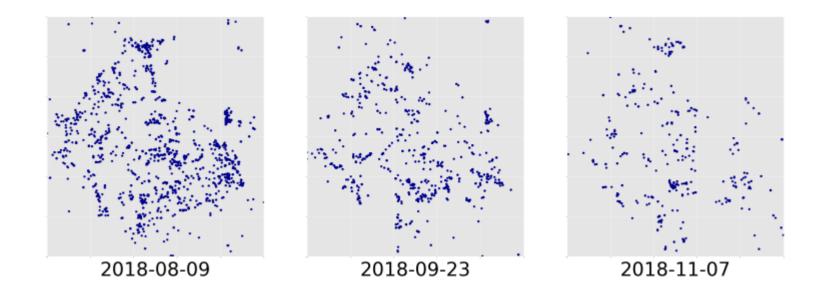

Outline

- What does research look like:
 - Research Overview
 - Example: Powerblade

- Sensing Systems Research
 - Various Projects
 - Signpost

The Signpost Project

An example of "Platforms" research

 Goal: platform that enables low-effort cityscale sensing deployments




What things might we want to sense at the scale of a city?

Air quality monitoring




Audio detection, classification, and localization

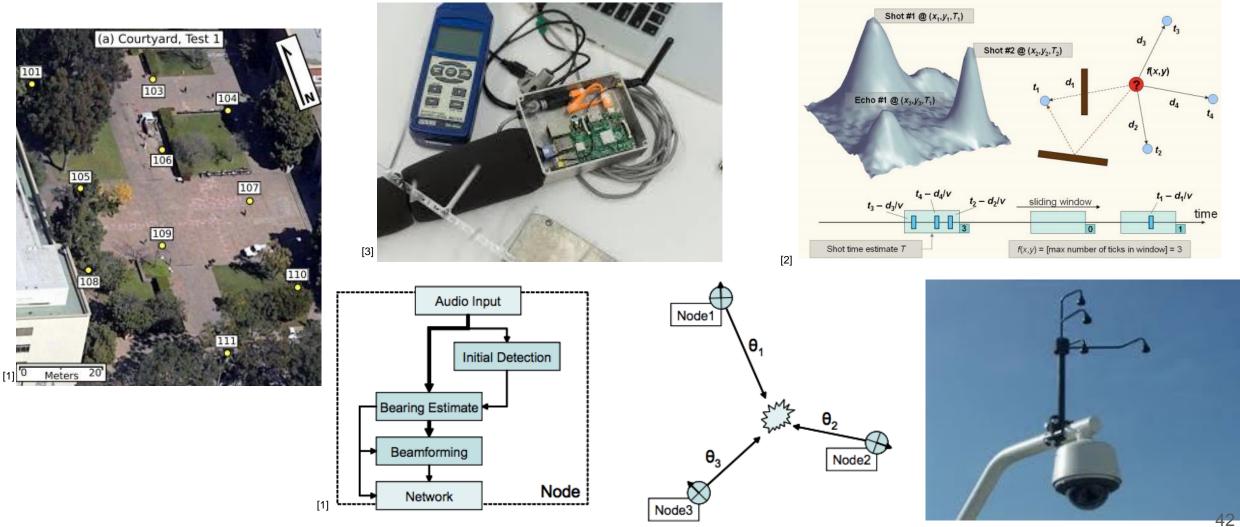

[1] Girod et al. The Design and Implementation of a Self-Calibrating Distributed Acoustic Sensing Platform. 2006. 2016.

[2] Lédeczi et al. Multiple Simultaneous Acoustic Source Localization in Urban Terrain. 2005. [3] Sounds of New York City.

Traffic queue sensing and congestion control

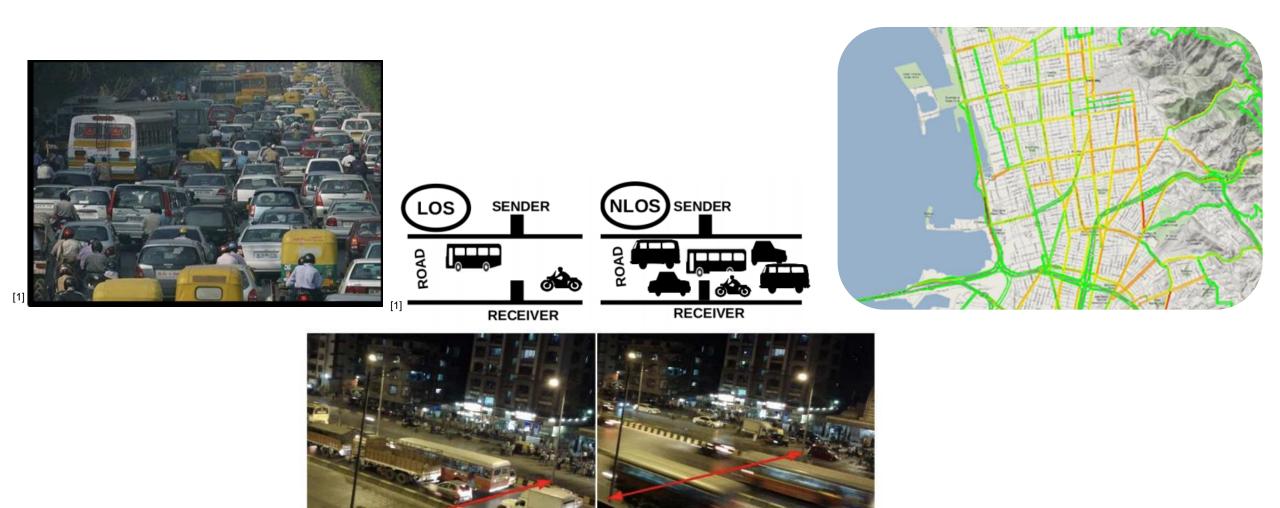



THE CITY OF COLUMBUS





am smart erdam





SMART DUBLIN









Smart Nation

The City of





Many Smart Ideas • One Smart Nation

1. City-Scale Sensing Introduction

2. Signpost

- Motivation
- Shared Resources
- Deployability
- Implementation
- Evaluation


Air Quality Monitoring

Urban Noise Classification







Traffic Queue Sensing

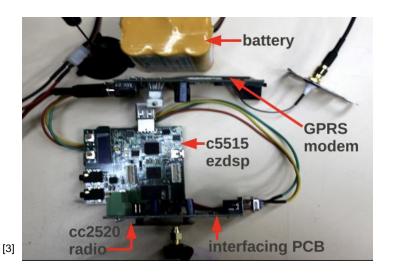

Lots of interesting applications and interested parties. But let's look at the process of actually creating and deploying an application.

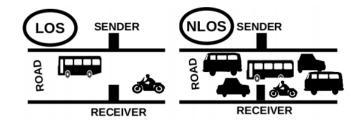


Sensing Hypothesis/Hardware

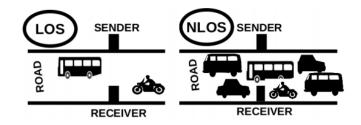

Sensing Hypothesis/Hardware



Networking Driver

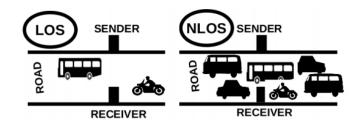


Sensing Hypothesis/Hardware



Networking Driver



Storage Storage Driver

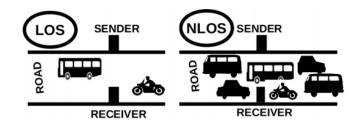

Sensing Hypothesis/Hardware




Networking Driver



Storage Storage Driver



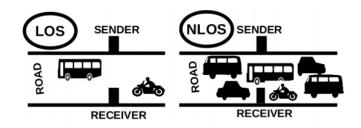

Sensing Hypothesis/Hardware




Networking Driver



Storage Storage Driver



Weatherproof Casing

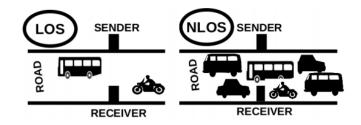

Sensing Hypothesis/Hardware




Networking Driver



Storage Storage Driver



Weatherproof Casing



Deploy

Key functions are repeated



Sensing Hypothesis/Hardware




Storage Driver



CORPORATION OF THE PROPERTY OF

Networking Driver





Key functions are repeated



Sensing Hypothesis/Hardware



Storage Storage Driver



CONTROL OF THE PROPERTY OF THE

Networking Driver



Weatherproof Casing



Deploy


Signpost Enables City-Scale Sensing



Sensing Hypothesis/Hardware



Integrate with Signpost



Deploy

Joshua Adkins, **Branden Ghena**, Neal Jackson, Pat Pannuto, Samuel Rohrer, Bradford Campbell, and Prabal Dutta "The Signpost Platform for City-Scale Sensing." *IPSN'18* - https://brandenghena.com/projects/signpost/adkins18signpost.pdf

1. City-Scale Sensing Introduction

2. Signpost

- Motivation
- Shared Resources
- Deployability
- Implementation
- Evaluation

Key functions are repeated



Sensing Hypothesis/Hardware



Storage Storage Driver




TOTAL CONTINUES OF THE PARTY OF

Networking

Networking Driver



Weatherproof Casing




Deploy

Higher power/linux class processing

Can be provided with a GPS

| Deployment | Services Needed | | | | | | |
|---------------------|-----------------|------------|------------|---------|------|-------|----------|
| | Power | Networking | Processing | Storage | Time | Synch | Location |
| Caraoke [3] | | | | | | | |
| Bouillet et al. [4] | | | | | | | |
| Aircloud [5] | | | | | | | |
| Girod et al. [6] | | | | | | | |
| Ledeczi et al. [7] | | | | | | | |
| SenseFlow [8] | | | | | | | |
| Argos [9] | | | | | | | |
| SONYC [1] | | | | | | | |
| Kyun Queue [10] | | | | | | | |
| Micronet [11] | | | | | | | |

Software abstraction through a single interface

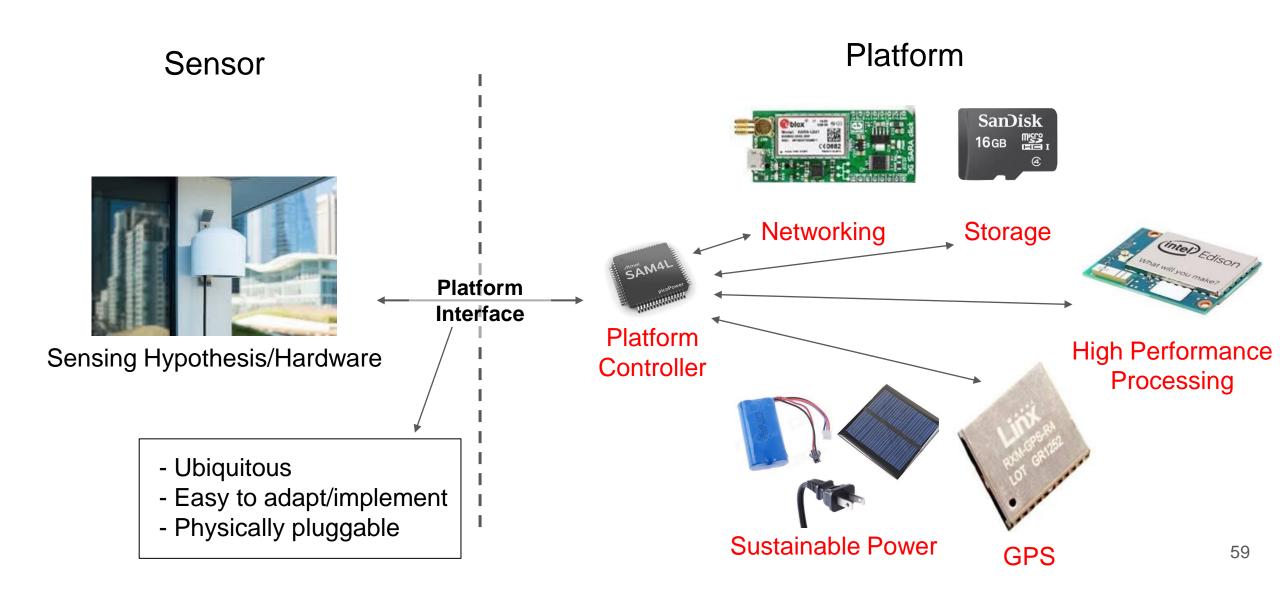

1. City-Scale Sensing Introduction

2. Signpost


- Motivation
- Shared Resources
- Deployability
- Implementation
- Evaluation

Some applications require granularity

Data can change greatly in low distances





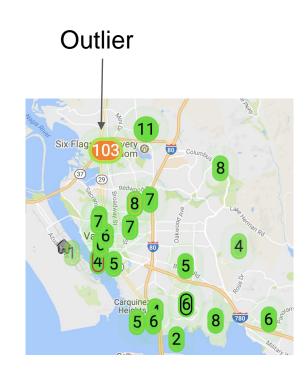

Deployment overhead drives cost

- Expensive to work with the city
- Time consuming
- Not conducive to experimentation!

Do not rely on wired infrastructure

- No wired power
 - Solar provides more power density than batteries
- No wired networking
- Should not modify existing infrastructure



Multi-tenancy is beneficial to testbeds

One deployment can enable many stakeholders simultaneously

Need to ensure that they do not conflict


Air Quality Monitoring



Urban Noise Classification



Traffic Queue Sensing

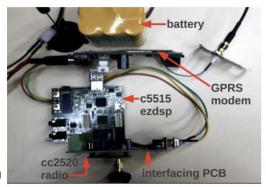

[3]

1. City-Scale Sensing Introduction

2. Signpost

- Motivation
- Shared Resources
- Deployability
- Implementation
- Evaluation


The Signpost Platform








Core modules provide shared resources

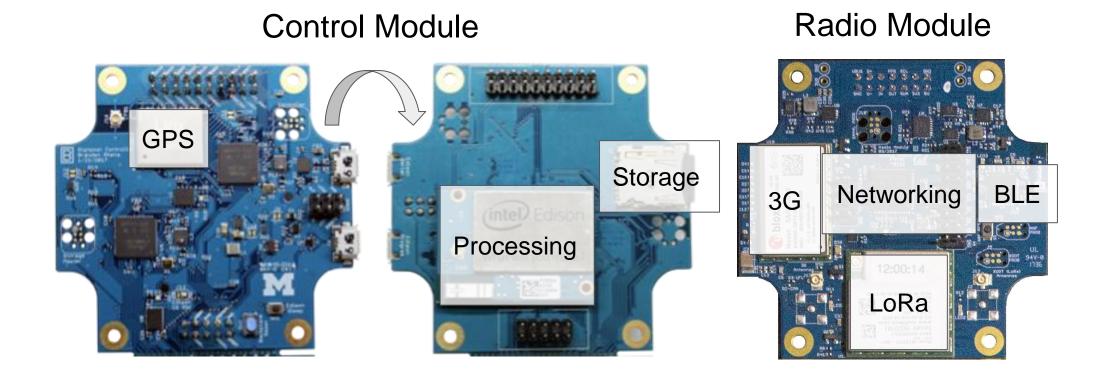


Making the platform modular supports upgradeability

Measurement and isolation support multi-tenancy




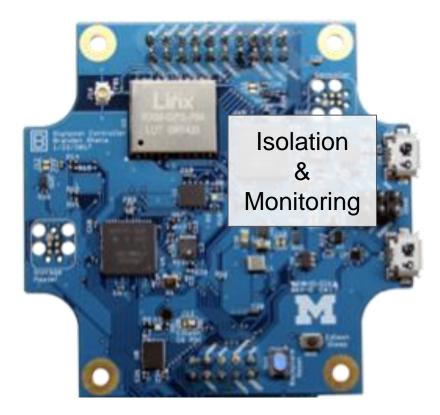

Standard interface for accessing shared resources

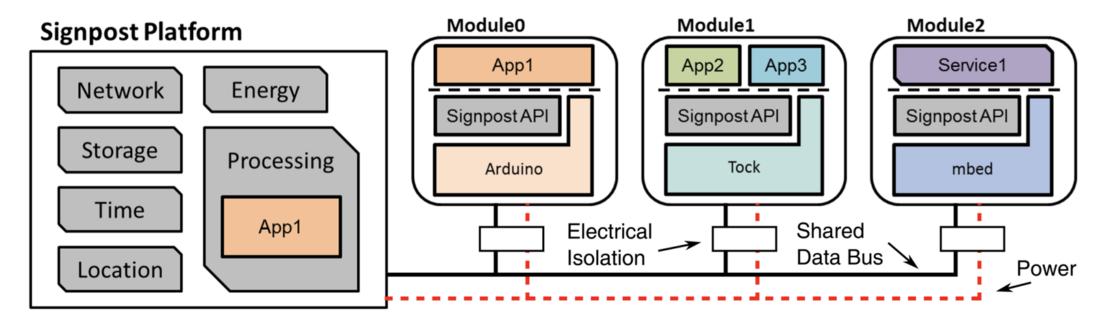

Any software framework can be used for modules




Only I2C and GPIO required

Optional
PPS 100ns global synch
USB

Array of Things is one platform approach

- Include sensors as platform resources
- Applications are software that act on sensor data
- High-power hardware and expensive to deploy

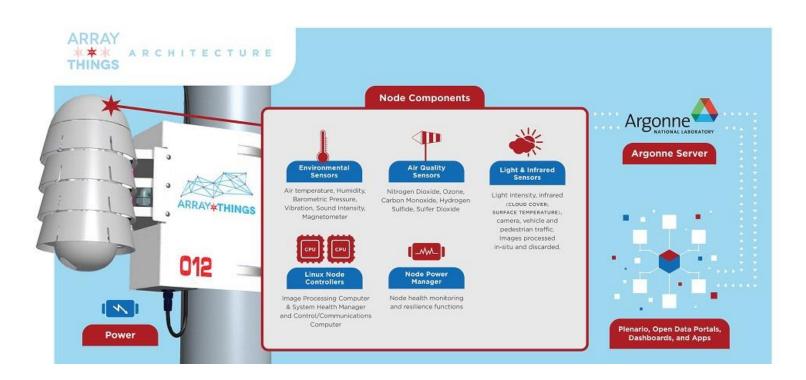



Signpost explores the other end of the spectrum

What can we do with less?

- Low-power, low-capability, extremely deployable
- Limited provided resources, but lots of extensibility

Focus on modularity


- Too difficult to start from scratch for every upgrade/change
 - Components are more expensive
 - Deployments is more difficult
- The platform should be viewed as shared infrastructure!
 - Amortize cost with multiple sensors and applications

1. City-Scale Sensing Introduction

2. Signpost


- Motivation
- Shared Resources
- Deployability
- Implementation
- Evaluation

How much power does a Signpost harvest?

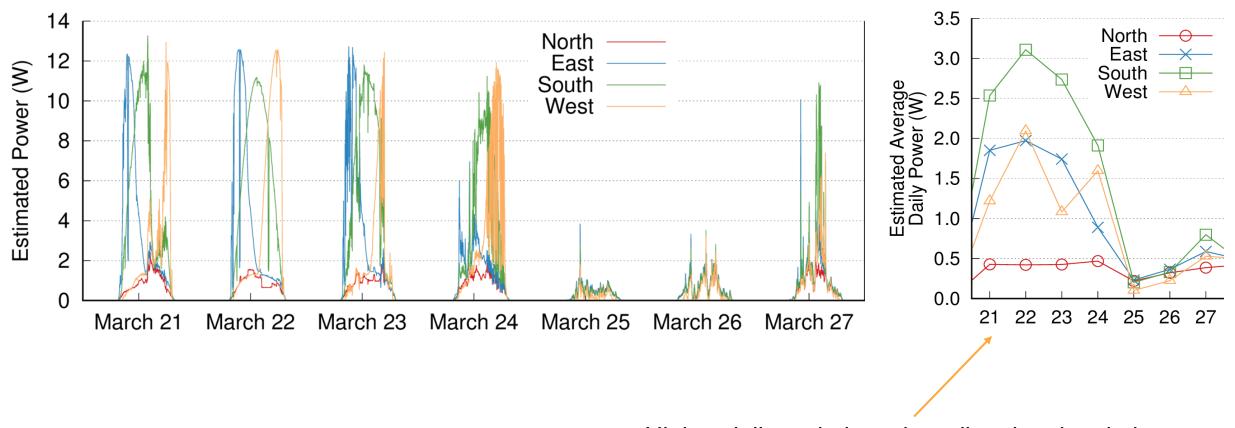


Higher daily variations than directional variations


How much power can each module draw?

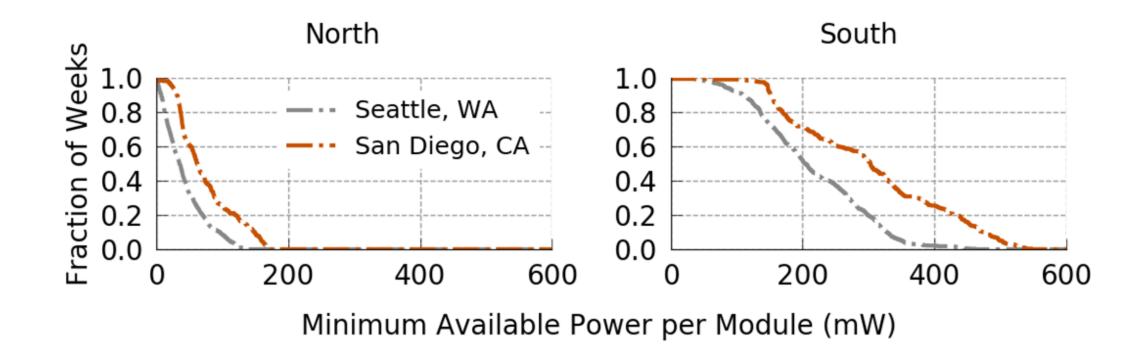


How much power can each module draw?

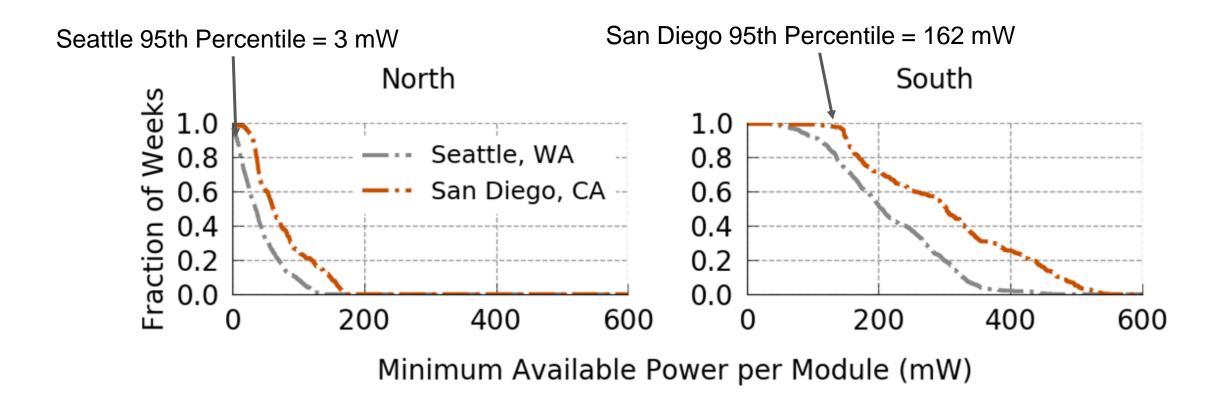

How much power can each module draw?

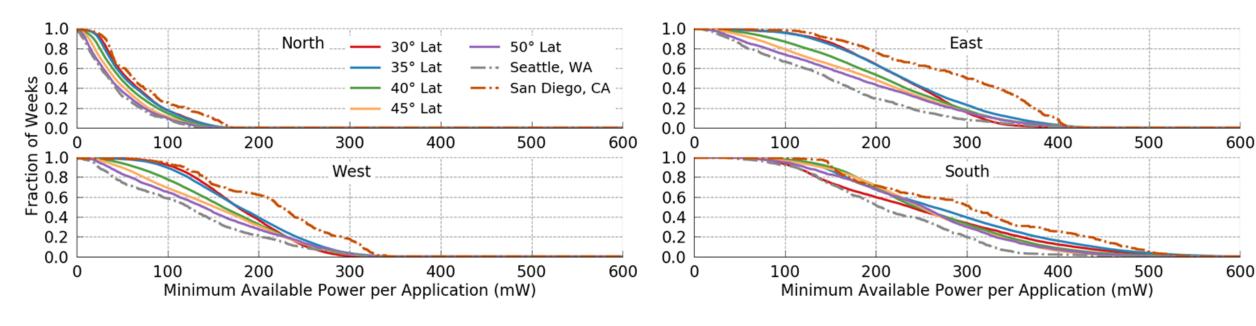



Resources are charged to modules which use them

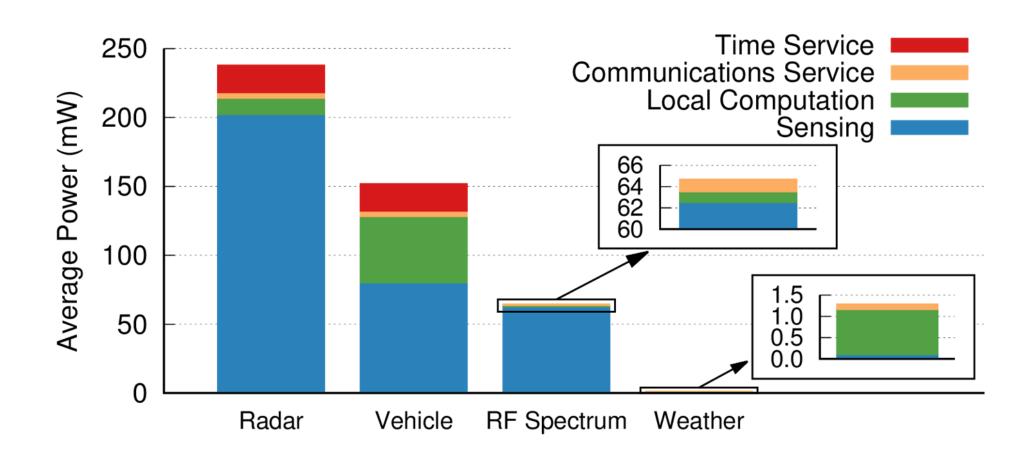

Applications running on Signpost

- Environmental monitoring (posting to Weather Underground)
- Vehicle counting (and bell tower)
- TV whitespace sensing

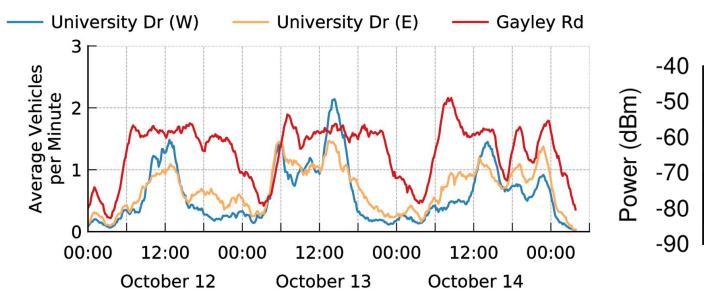

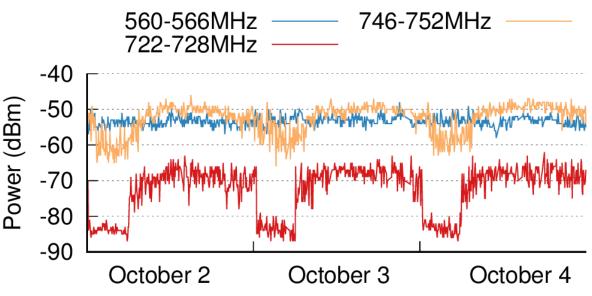

Outline

- What does research look like:
 - Research Overview
 - Example: Powerblade

- Sensing Systems Research
 - Various Projects
 - Signpost